


NIMFE-EM12/4.9L88-UP6X-H1141/S1182

Magnetic field sensor – For detection of M6 weld nuts


For Detection of Ferromagnetic Parts

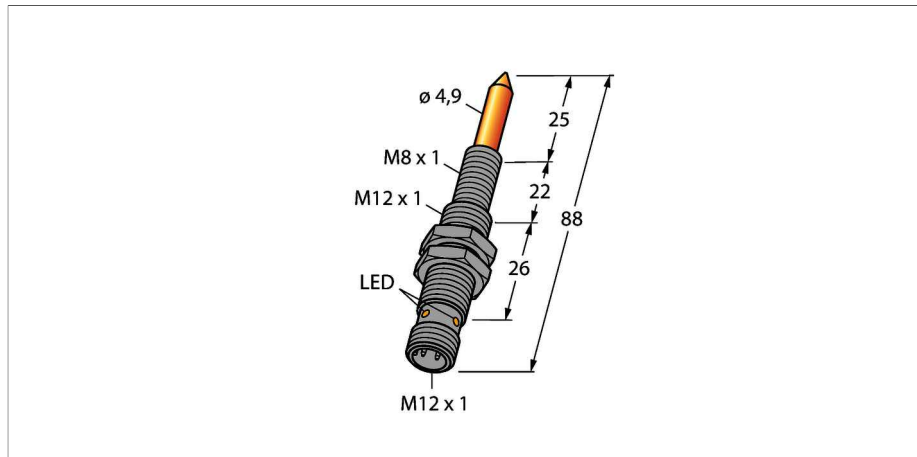

Features


- Threaded barrel, M12 x 1
- Stainless steel, 1.4301
- DC 3-wire, 10...30 VDC
- NC/NO parametrizable with teach adapter VB2-SP1
- M12 x 1 male connector

Wiring diagram



Functional principle

The weld sensors are available in different versions, with different signal intensities and diameters. Ferromagnetic parts which differ strongly in their material properties and diameters can thus be detected. A target part has to be located within the so called sensitive area in order to be detected. The internal sensor signal reaches the maximum intensity if the sensitive area is completely covered by the target. Partial coverage is also possible. Sensitive area $S = 9 \text{ mm}$
 Within this area the sensor signal changes when components are connected.
 Maximum range $M = 13 \text{ mm}$
 In case of complete coverage of the sensitive area the maximum signal intensity is achieved.

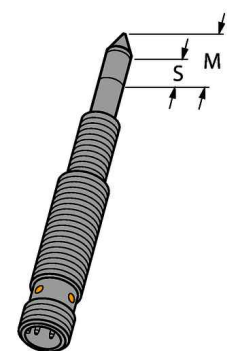

Technical data

Type	NIMFE-EM12/4.9L88-UP6X-H1141/S1182
ID number	1600616
Ambient temperature	-25...+70 °C
Operating voltage	10...30 VDC
Residual ripple	$\leq 10\% U_s$
DC rated operational current	$\leq 100 \text{ mA}$
No-load current	$\leq 15 \text{ mA}$
Residual current	$\leq 0.1 \text{ mA}$
Isolation test voltage	$\leq 0.5 \text{ kV}$
Short-circuit protection	yes / Cyclic
Voltage drop at	$\leq 1 \text{ V}$
Wire breakage/Reverse polarity protection	yes / Complete
Output function	3-wire, Connection programmable, PNP
Design	Threaded barrel, M12 x 1
Dimensions	88 mm
Housing material	Stainless steel, V2A (1.4301)
Active area material	Stainless steel, V2A (1.4301), TIN coating
Max. tightening torque housing nut	10 Nm
Electrical connection	Connector, M12 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED green
Switching state	LED yellow

Mounting accessories

VB2-SP1**A3501-29**

Teach adapter

