
FEMALE END VIEW
2 4
1 = GREEN 2 = WHITE 3 = BLUE 4 = GREY 5 = YELLOW 6 = BROWN
mini iast.

SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	8.0 A				
RATED VOLTAGE [V]	600 V				
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	6x18 AWG				
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)				
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K				

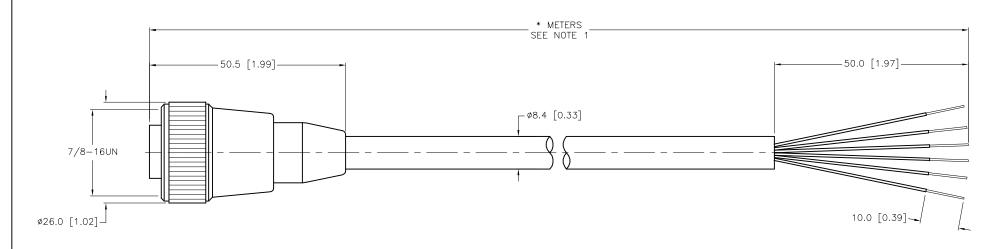

RELATED DOCUMENTS

SEE SPECIFICATIONS

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

## SOURCE DRAWING - FOR REFERENCE ONLY

FILE: 777001037

3000 CAMPUS DRIVE

MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us

REV

SHEET 1 OF 1

2. 3. 4.	⊕ ←	INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		RC		1-80 (763 (763 w
MATERIAL		DRFT RDS	DATE 01/13/05	DESCRIPTION	DIAL A	24 444
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0		RKM 6	>1−*M
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF MI	EASUREMENT	IDENTIFICATION NO.		
FINISH	CONTACT TURCK	MILLIMETI	ER [ INCH ]	IDENTIFICATION NO.		
SEE SPECIFICATIONS	FOR MORE INFORMATION					

THIS DRAWING IS CONFIDENTIAL AND THE

DO NOT SCALE THIS DRAWING

3RD ANGLE PROJECTION

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

G	UPDATE PROTECTION CLASS	СВМ	04/13/21	76628
REV	DESCRIPTION	BY	DATE	ECO NO.