



SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON or TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	250 V			
OUTER CABLE JACKET MATERIAL/COLOR	TPE/YELLOW			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	4x18 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68			

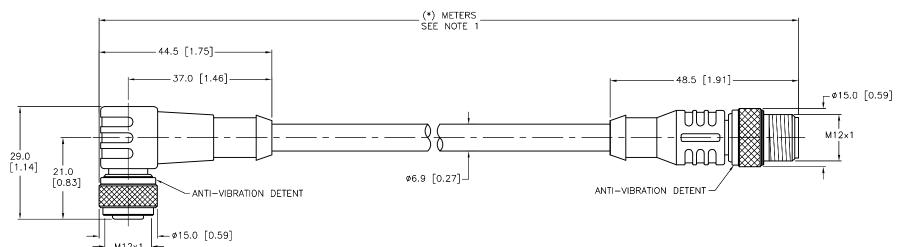



CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNLESS OTHERWISE SPECIFIED				

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:	
1. (*) INDICATES CABLE LENGTH IN METE SPECIFIC LENGTHS.	RS. CONTACT TURCK TO ORDER
2. "/S1587" DESIGNATES (ENDUROFLEX)	TPE CABLE.

L					
	ш	UPDATED M12 CTA PER ECO	TV	11/16/16	52506
Γ	REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		rck '	3000 CAMPUS MINNEAPOLIS, MN 1-800-544-7 (763) 553-7 (763) 553-0 www.turck.u	55441 7769 300 708 fax
MATERIAL		DRFT RDS	DATE 10/10/03	DESCRIPTION WKC 4.4T-*-RSC	1 1T/C1E	07
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.0	WKC 4.41-1-K3C	4.41/313	0 /
DRAWING ARE FOR		UNIT OF MEASUREMENT				
FINISH	1		-n [mou]	IDENTIFICATION NO.		REV
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]				E
		DO NOT SCALE	THIS DRAWING	FILE: 777002623	SHEET	1 OF 1