
MALE END VIEW
5 0 0 0 1 7 8
1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GRAY 6 = PINK 7 = BLUE 8 = RED  M16 connector

SPECIFICATIONS					
CONTACT CARRIER MATERIAL	TPU				
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL				
RATED CURRENT [A]	7.0 A				
RATED VOLTAGE [V]	125 VAC/VDC				
OUTER JACKET MATERIAL/COLOR	PVC/YELLOW				
CONDUCTOR INSULATION MATERIAL	PVC				
NUMBER OF CONDUCTORS [AWG]	8x18 AWG				
TEMPERATURE RANGE	-40°C TO +105°C (-40°F TO +221°F)				
PROTECTION CLASS	MEETS IEC IP67				

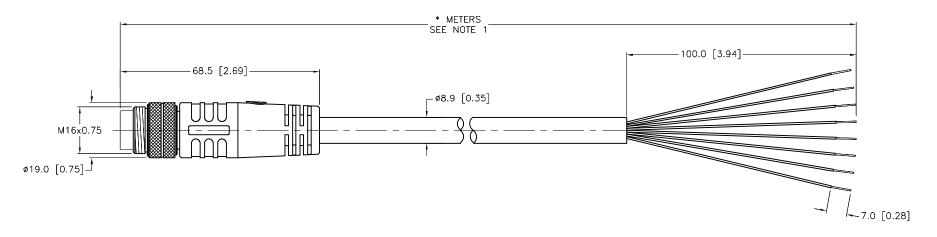

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
*UNLESS OTHERWISE SPECIFIED				

## NOTES:

1. "\*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

I	UPDATE CABLE DIAMETER	RDS	04/17/12	37299
REV	DESCRIPTION	BY	DATE	ECO NO.

## SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS  1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		rck	3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us
MATERIAL		DRFT RDS	DATE 01/05/04	DESCRIPTION BSM 8-0	107 *
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	APVD	SCALE 1=1.3	D3W 0-C	00/
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.	l REV
FINISH	CONTACT TURCK	MILLIMETE	ER[INCH]	IDENTIFICATION NO.	
SEE SPECIFICATIONS	FOR MORE INFORMATION				
		DO NOT SCALE	THIS DRAWING	FILE: 777002831	SHEET 1 OF 1