


SPECIFICATIONS				
CONTACT CARRIER MATERIAL	NYLON OR TPU			
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW			
CONTACT MATERIAL/PLATING	BRASS/GOLD			
COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED			
RATED CURRENT [A]	4.0 A			
RATED VOLTAGE [V]	250 V			
OUTER CABLE JACKET MATERIAL/COLOR	PVC/GRAY			
CONDUCTOR INSULATION MATERIAL	PVC			
NUMBER OF CONDUCTORS [AWG]	5x22 AWG			
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)			
PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K			

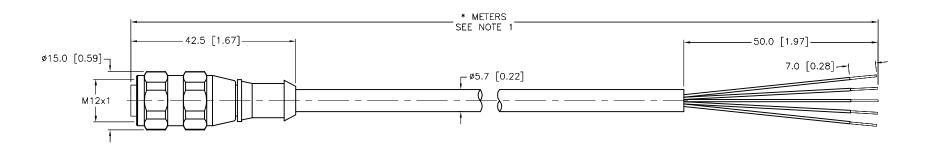

CABLE LENGTH	TOLERANCE *			
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER			
STRIP LENGTH	TOLERANCE *			
0-7mm	±0.5mm			
8-29mm	±1.0mm			
30-49mm	±2.0mm			
50-69mm	±3.0mm			
70-100mm	±4.0mm			
OVER 100mm	±5.0mm			
* UNILESS OTHERWISE SPECIFIED				

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

					1
D	DRAWING PROCESSED AS PART OF ECO 33971	СВМ	04/06/11	33971	ĺ
REV	DESCRIPTION	BY	DATE	ECO NO.	

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	Sensors and Automation Controls	3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 turck.com	1 55441 7769 300 708 fax
MATERIAL		DRFT RWC	DATE 06/06/07	DESCRIPTION RKV 4.5	T_*	
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS	DSGN	SCALE 1=1.0	1111 4.5	1 —	
	DRAWING ARE FOR REFERENCE ONLY	UNIT OF ME	ASUREMENT	IDENTIFICATION NO.		REV
FINISH	CONTACT TURCK	MILLIMETE	ER [INCH]			
SEE SPECIFICATIONS	FOR MORE INFORMATION					U
		DO NOT SCALE	THIS DRAWING	FILE: 777003549	SHEET	1 OF 1