



REV DESCRIPTION

SPECIFI	CATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU	
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW	
CONTACT MATERIAL/PLATING	BRASS/GOLD	
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	
RATED CURRENT [A]	4.0 A	
RATED VOLTAGE [V]	250 V	
OUTER JACKET MATERIAL/COLOR	TPU/GRAY	
CONDUCTOR INSULATION MATERIAL F	PVC	
NUMBER OF CONDUCTORS [AWG]	3x22 AWG	
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)	
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68	

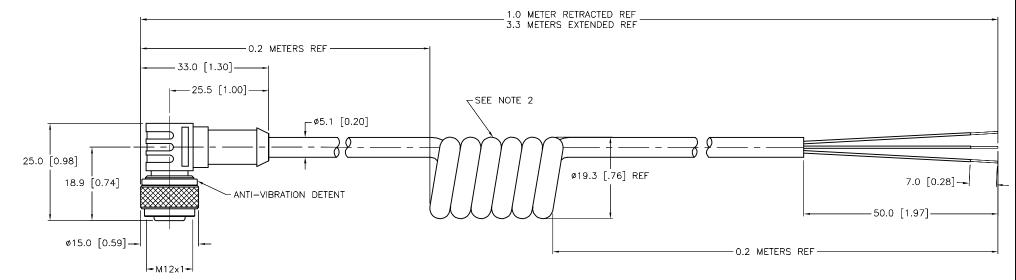



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE. 2. NUMBER OF COILS IS REFERENCE ONLY. I DRAWING PROCESSED AS PART OF ECO 39311 KMY 10/03/12 39311

DATE

ECO NO.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	(
2. 3. 4.		>
MATERIAL		П
SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	,
FINISH	CONTACT TURCK	
SEE SPECIFICATIONS	FOR MORE INFORMATION	

THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT CBM

DATE 10/09/00 DESCRIPTION

WILL AT 3.3

FILE: U2374

3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com

REV

APVD SCALE 1=1.0

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

WK 4T-3.3/S90-SP

IDENTIFICATION NO. U2374